

AX8-JUNIOR

Arrow's Kart for Junior Classes using 'Low grip SL' tyres



- 28mm diameter stress relieved chrome moly tubing main chassis structure with fixed front cross beam.
- Bolt-on front pedal box chassis structure.
- 100.5cm wheelbase.
- 30 & 40mm axle options, supported by 3 bearings.
- Arrow's unique machined billet alloy one piece bearing flanges.
- Removable/Adjustable rear torsion bar.
- Ventilated 18mm wide rear brake disc.
- Machined billet alloy two spot caliper.
- Machined billet alloy master cylinder.
- Machined billet alloy sprocket hub and disc hub.
- Rear wheel hubs:
70mm long machined billet alloy (40mm axle);
90mm long machined alloy (30mm axle).
- 8mm precision ground king-pin bolts.
- Adjustable camber/caster.
- Adjustable front ride height.
- Adjustable Ackerman.
- Steel steering tie rods.
- Aluminium components anodized purple.
- Arrow's unique anti-vibration engine mount.
- 6.5-litre fuel tank.
- Arrow flat top suede steering wheel.
- CIK homologated front nosecone and nassa panel.
- Arrow AX# style sidepods.
- Arrow AX8 graphics kit.
- One piece machined alloy 3 spoke wheels;
Front – 130mm (5.1") wide x 5" diameter;
Rear – 205mm (8") wide x 5" diameter.

AX8 - Junior Features



Machined billet alloy brake master cylinder



Flat top suede steering wheel with embroidered Arrow logo



Arrow's unique self-centering seat washers



Ventilated 18mm wide brake disc and machined billet alloy two spot caliper



Adjustable camber/caster and Ackerman




One-piece machined alloy 3 spoke wheels




Arrow's unique anti-vibration engine mount



Rear axle supported by three bearings



Removable/Adjustable rear torsion bar

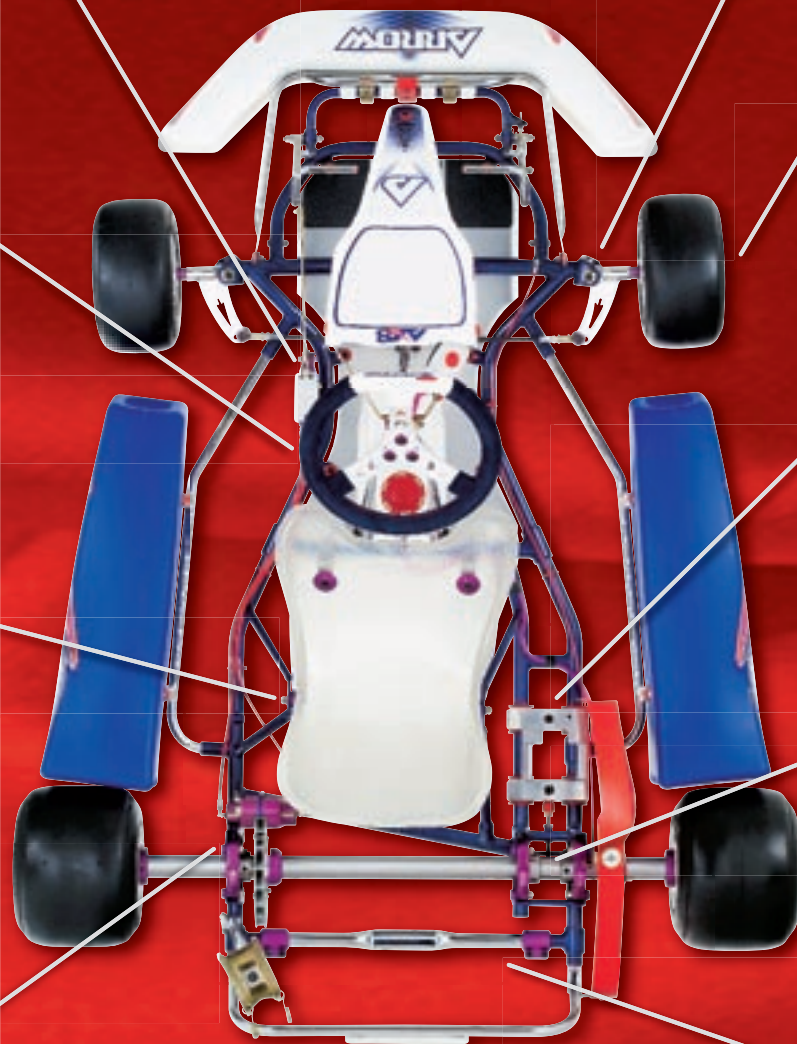

Due to constant development, specifications may change without notice